




2 ANNI DI GARANZIA
2 YEARS OF WARRANTY

90970

Code	Nominal lumen	W	CCT	Beam
90970/10/3K	160	3	3100K	10°
90970/10/4K	180	3	4000K	10°
90970/10/6K	200	3	6000K	10°
90970/45/3K	160	3	3100K	45°
90970/45/4K	180	3	4000K	45°
90970/45/6K	200	3	6000K	45°

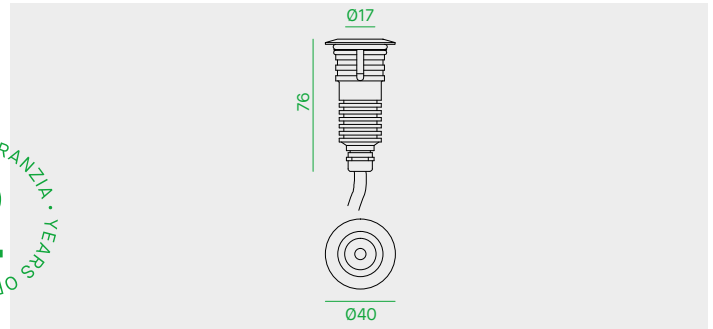

CRI 85	CRI 6K70	10°	45°	33mm	mA 700	DRIVER NOT INCLUDED	S series	IK08	IP67	CE	F	III	A++	A+	A
--------	----------	-----	-----	------	--------	---------------------	----------	------	------	----	---	-----	-----	----	---


Incastro LED calpestabile tondo e quadro per installazione a parete, a soffitto o a pavimento.

Walk over round and square recessed LED luminaire for wall, ceiling or ground installation.

Ecastré de sol LED rond ou carré pour installation en plafond, au sol ou au mur.

Begehbarer quadratischer oder runder LED-Einbau für Boden, Wand oder Deckeninstallation.

LED CREE	CREE LED	LED CREE	CREE LED
Life time 50.000h (rendimento 70%).	Life time 50.000h (70% lumen maintenance).	Durée de vie 50.000h (rendement 70%).	Lebensdauer 50.000h (Lichtstrom 70%).
Anello in acciaio AISI 316 (disponibile su richiesta anello in acciaio lucido). Corpo in alluminio anodizzato nero.	AISI 316 stainless steel ring (steel polish ring available on request). Body in black anodized aluminium.	Colerette en acier AISI 316L (disponible sur demande colerette acier brillant). Corps en aluminium anodisé noir.	Ring aus Stahl AISI 316L (Ring verfügbar in polierten Edelstahl). Gehäuse aus schwarz eloxiertem Aluminium.
Lente in metacrilato. Cavo in neoprene H05RN-F 2x0,75mm ² di 1m.	Methacrylate lens. Neoprene H05RN-F 2x0,75mm ² cable of 1m.	Lentilles en méthacrylate. Câble en néoprene H05RN-F 2x0,75mm ² de 1m.	Methacrylat Linse. Neopren Kabel H05RN-F 2x0,75mm ² - 1m.
Il collegamento di più apparecchi ad un solo alimentatore va effettuato in serie	In case more fittings have to be connected to one power supply, connect them in series	Il est possible de brancher en série plusieurs appareils sur la même alimentation	Mehrere LED-Leuchten sollten reihenschaltbar werden
Alimentatore non incluso.	Power supply not included.	Alimentation non incluse.	Netzgerät nicht enthalten.

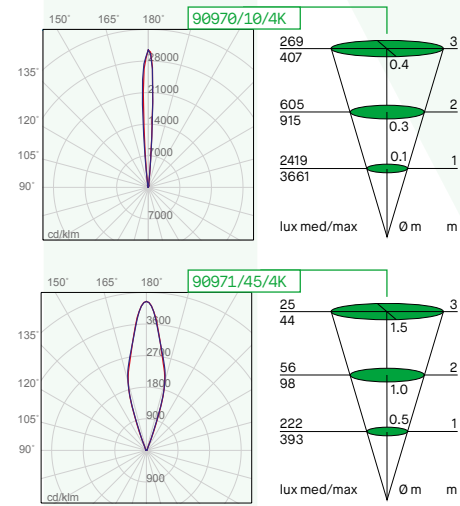


C/CASSA X 90970

La controcassa in alluminio è inclusa nella confezione ma può essere anche ordinata separatamente.

The aluminium housing is included, but can be ordered separately if needed.

Boîtier d'encastrement en aluminium inclus dans l'emballage, mais il y a la possibilité de la commander séparément.

Einbaugehäuse aus Aluminium enthalten, kann aber auch separat bestellt werden.

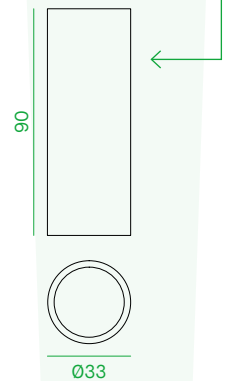

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen.

Code	Output Power W		mA	IP	n. apparecchi / n. fittings		Dimmer
	min.	max.			min.	max.	
5750	0	3	700	IP20	1	1	/
5760	5	9	700	IP20	2	3	/
5770	0	17	700	IP20	1	5	/
5771	12	19	700	IP20	5	6	/
5781	21	37	700	IP20	8	12	PUSH o DALI
5787	4	32	700	IP20	2	10	/