




2 ANNI DI GARANZIA  
2 YEARS OF WARRANTY

**91000**

Code	Nominal lumen	W	CCT	Beam
91000/45/3K	80	1	3100K	45°
91000/45/4K	90	1	4000K	45°
91000/45/6K	100	1	6000K	45°

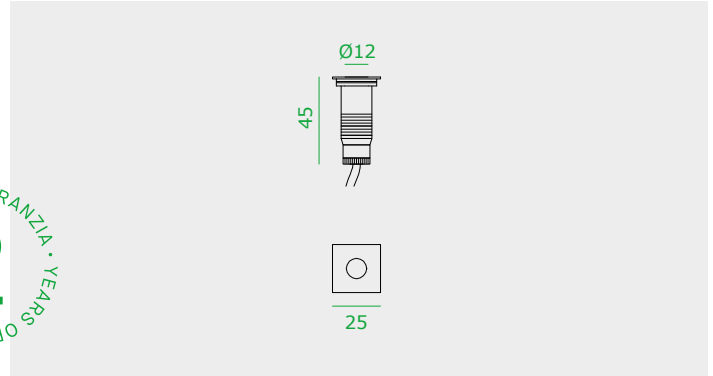

CRI 85	CRI 6K70	45°	25mm	350mA	DRIVER NOT INCLUDED	S series	IK06	IP65	CE	F	III	A++	A+	A
--------	----------	-----	------	-------	---------------------	----------	------	------	----	---	-----	-----	----	---

Incasso LED calpestabile tondo e quadro per installazione a parete, a soffitto o a pavimento.

Walk over round and square recessed LED luminaire for wall, ceiling or ground installation.

Encastré de sol LED rond ou carré pour installation en plafond, au sol ou au mur.

Begehbarer quadratischer oder runder LED-Einbau für Boden, Wand oder Deckeninstallation.

LED CREE	CREE LED	LED CREE	CREE LED
Life time 50.000h (rendimento 70%).	Life time 50.000h (70% lumen maintenance).	Durée de vie 50.000h (rendement 70%).	Lebensdauer 50.000h (Lichtstrom 70%).

Anello in acciaio AISI 316 (disponibile su richiesta anello in acciaio lucido). Corpo in alluminio anodizzato nero. Molla per controsoffitto.

AISI 316 stainless steel ring (steel polish ring available on request). Body in black anodized aluminium. Fixing spring for suspended ceiling.


Colerette en acier AISI 316L (disponible sur demande colerette acier brillant). Corps en aluminium anodisé noir. Ressort pour faux-plafond.

Ring aus Stahl AISI 316L (Ring verfügbar in polierten Edelstahl). Gehäuse aus schwarz eloxiertem Aluminium. Feder für abgehängte Deckeninstallation.

Lente in metacrilato. Cavo in neoprene H05RN-F 2x0,75mm <sup>2</sup> di 0,5m.	Methacrylate lens. Neoprene H05RN-F 2x0,75mm <sup>2</sup> cable of 0,5m.	Lentilles en méthacrylate. Câble en néoprène H05RN-F 2x0,75mm <sup>2</sup> de 0,5m.	Methacrylat Linse. Neopren Kabel H05RN-F 2x0,75mm <sup>2</sup> - 0,5m.
---	--	---	--

Il collegamento di più apparecchi ad un solo alimentatore va effettuato in serie	In case more fittings have to be connected to one power supply, connect them in series	Il est possible de brancher en série plusieurs appareils sur la même alimentation	Mehrere LED-Leuchten sollten reihengeschaltet werden
--	--	---	--

Alimentatore non incluso.	Power supply not included.	Alimentation non incluse.	Netzgerät nicht enthalten.
---------------------------	----------------------------	---------------------------	----------------------------

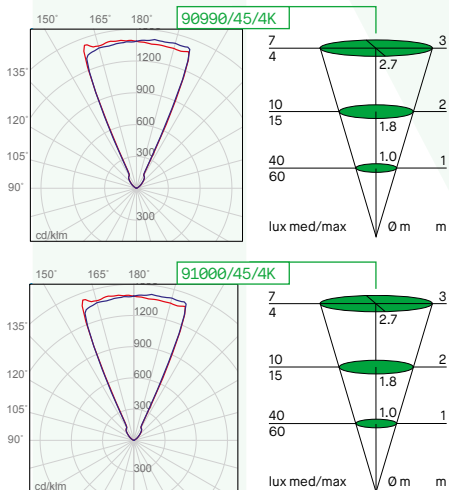

C/CASSA X 90990

La controcassa in policarbonato è inclusa nella confezione ma può essere anche ordinata separatamente.  
The polycarbonate housing is included, but can be ordered separately if needed.

Boitier d'encastrement en polycarbonate inclus dans l'emballage, mais il y a la possibilité de la commander séparément.  
Einbaugehäuse aus Polykarbonat ist enthalten, kann aber auch separat bestellt werden.

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen.

Code	Output Power W		mA	IP	n. apparecchi / n. fittings		Dimmer
	min.	max.			min.	max.	
5701	0	3	350	IP20	1	2	/
5720	0	8	350	IP20	1	7	/
5730	0	11	350	IP20	1	9	/
5780	0	15	350	IP20	1	14	/