



91090

Codice - Code	Nominal lumen	W	CCT	mA	Lens	CRI
91090/45/3K	180	3	3000K	700	40°	85
91090/45/4K	200	3	4000K	700	40°	85

2 ANNI DI GARANZIA
OF GUARANTEE

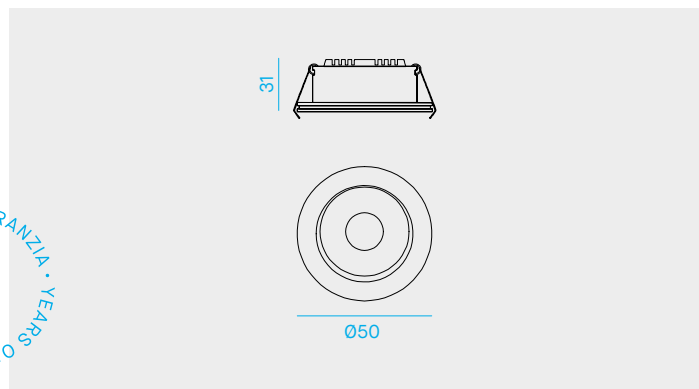

Incasso LED orientabile per installazione nel controsoffitto.

Adjustable recessed LED fitting for false ceiling installation.

Appareil à encastrer LED orientable pour installation dans faux-plafond.

LED-Deckeneinbau verstellbar.

LED CREE

CREE LED.

LED CREE

CREE LED.

Life time 50.000h (rendimento 70%).

Life time 50.000h (70% lumen maintenance).

Durée de vie 50.000h (rendement 70%).

Lebensdauer 50.000h. (Lichtstrom 70%).

Anello in alluminio. Corpo in alluminio anodizzato nero. Lente in metacrilato.

Ring in aluminium. Body in black anodized aluminium. Methacrylate lens.

Colerette en aluminium. Corps en aluminium anodisé noir. Lentilles en méthacrylate.

Aluminiumring. Gehäuse aus schwarz eloxiertem Aluminium. Methacrylat Linse.

Alimentatore non incluso.

Power supply not included.

Alimentation non incluse.

Netzgerät nicht enthalten.

Il collegamento di più apparecchi ad un solo alimentatore va effettuato in serie.

In case more fittings have to be connected to one power supply, connect them in series.

Il est possible de brancher en série plusieurs appareils sur la même alimentation.

Mehrere LED-Leuchten sollten reihengeschaltet werden.

Alimentatori da ordinare separatamente - Power supplies to be ordered separately - Unités d'alimentation à commander séparément - Netzgerät separat zu bestellen.

Code	Output Power W		mA	IP	n. apparecchi - n. fittings		Dimmer
	min.	max.			min.	max.	
5750	0	3	700	IP20	1	1	/
5760	5	9	700	IP20	2	3	/
5770	0	17	700	IP20	1	5	/
5771	12	19	700	IP20	5	6	/
5781	21	37	700	IP20	8	12	PUSH o DALI
5787	4	32	700	IP20	2	10	/