



# UFO 150W



130 lm / Watt  
💡 ⚡



INVERTRONICS DRIVER  
LED TYPE SMD **PHILIPS**

EMERGENCY KIT  
COMPATIBLE

2M CABLE  
POLYCARBONATE COVER ANTI IMPACTS

MULTI  
TENSION

CODE	CCT	LUMENS	CD	POWER	VOLTAGE	ANGLE	PF	A	Hz
4205	4.000 K	19.500	7.200	150W	100-260V	110°	> 0,9	0,6	50/60
4215	5.000 K	19.900	7.700	150W	100-260V	110°	> 0,9	0,6	50/60



ALUMINIUM



IP65



LED  
PHILIPS




+50°C  
-30°C

RoHS

100-260V  
50.000h

>80  
CRI



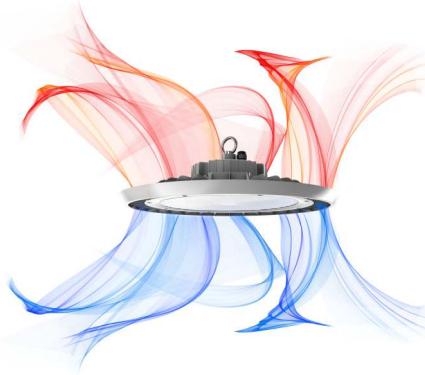

Dank des Dissipationssystems wird die Leistung und die Lebensdauer der LED verbessert.


Thanks to its dissipation system improves the performance and the useful life of the LED's.

Grâce au système de dissipation de chaleur la led améliore son efficacité énergétique et sa durée de vie.


Grazie al suo sistema di dissipazione il rendimento e la vita del LED's migliorano.

Gracias a su sistema de disipación mejora el rendimiento y la vida útil de los LED's.

LIRA 100W - 150W - 200W  
CODE 3798

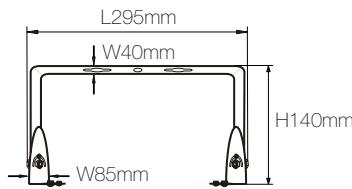

LIRA 240W  
CODE 3799

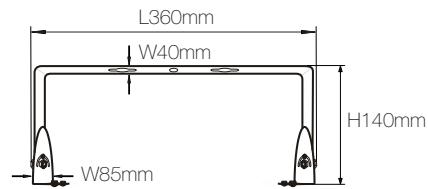

### INVERTRONICS DRIVER



RoHS



SELV



Spannungsbereich 90 ~ 305 Vac, Überspannungsschutz (OVP),  
Überhitzungsschutz (OTP) und Kurzschlusschutz (SCP).



Voltage range is 90~305 Vac, with over-voltage protection (OVP), over-temperature protection (OTP) and short-circuit protection (SCP).



Gamme de tension de 90 ~ 305 Vac, protection contre les surtensions (OVP), protection contre la surchauffe (OTP) et la protection contre courts-circuits (SCP).



Campo di tensione di 90 ~ 305 Vac, protezione da sovratensione (OVP), protezione termica (OTP) e cortocircuito (SCP).



Rango de voltaje de 90 ~ 305 Vac, protección contra sobretensión (OVP), protección contra sobretemperatura (OTP) y protección contra cortocircuitos (SCP).